



International Journal of Emerging Technologies in Computational and Applied Sciences (IJETCAS)

www.iasir.net

Particle Swarm Optimization Algorithm for Designing Optimal IIR Digital Filter

Ranjit Kaur¹, Damanpreet Singh²
Department of Electronics & Communication¹
Punjabi University, Patiala, Punjab, India¹
Department of Computer Science²

Sant Longowal Institute of Engineering & Technology, Longowal, Punjab, India²

Abstract: A particle swarm optimization (PSO) algorithm with constriction factor and inertia weight is applied for magnitude approximation of infinite impulse response (IIR) filter based on L_1 -approximation error criterion. The proposed particle swarm optimization algorithm, which is a population-based stochastic optimization technique enhances the search capability and provides a fast convergences for calculating the optimal filter coefficients. The filter designed based on L_1 -approximation error possesses flat passbands and stopbands while keeping the transition band comparable to that of the least square design. A comparison has been made with other design techniques, demonstrating that PSO with enhanced diversity and convergence gives better or at least comparable results or designing digital IIR filters than the existing genetic algorithm based methods.

Keywords: Digital IIR filters, Particle Swarm Optimization, L_1 -approximation error, magnitude response, Stability.

I. Introduction

The digital filters are used for the processing and filtering of the digital signals. Some advantages of a digital filter are: 1) reproducible response; 2) not temperature sensitive; 3) programmable. Digital filters are of two types; finite impulse response (FIR) and infinite impulse response (IIR) filter. IIR filters are more efficient than FIR filters because, for a given frequency response, they require fewer delay elements, adders, and multipliers. An IIR filter can give a sharper cut-off than an FIR filter of the same order because both poles and zeros are present. However, a causal IIR filter cannot achieve exactly linear phase but the FIR filter can [1]. The digital IIR filter design is essentially a multiparameter and multicriterion optimization problem with multiple local optima, the conventional gradient-based design methods may easily get stuck in the local minima of error surface. So, it is very necessary to develop efficient optimization algorithms to deal with digital IIR filter design problems. Some researchers have developed design methods based on modern heuristics optimization algorithms such as genetic algorithms [2-6], seeker-optimization-algorithm-based evolutionary method [7], simulated annealing [8], tabu search [9], ant colony optimization [10], hybrid taguchi genetic algorithm (HTGA) [11], immune algorithm (TIA) [12] and many more.

The efficiency of population based genetic algorithms (GAs) exaggerated by the convergence time because in GAs chromosomes have to endure genetic operations such as crossover and mutation to find the finest solution. To overcome this deficiency population based stochastic optimization techniques have been discussed in various literatures. The most known among those is developed in [13-14] and is known as Particle Swarm Optimization (PSO). PSO is inspired by social behavior of bird flocking or fish schooling. It uses a number of particles that form a swarm. Each particle traverses the search space looking for the global optima. Each particle remembers two positions in the search space. The first is the position of the particle's own best point and other is best point of the entire swarm. PSO is a global optimization technique which is very simple to implement and converge quickly. Due to the efficiency and capability of PSO in the minimization of multimodal functions with numerous local and global minima, the PSO and its variants has been verified by various researchers in digital filter design problems [15-22].

The magnitude response of IIR filter is more important in real time applications than phase response. In this paper PSO is applied efficiently for magnitude approximation of low-pass (LP) and high-pass (HP) IIR digital filter. The values of the filter coefficients are optimized with PSO approach to minimize magnitude response error with L_1 error criterion. The paper is arranged as follows. Section II describes the IIR filter design problem statement. The PSO algorithm for designing the optimal digital IIR filters is described in Section III. In Section IV, the performance of the proposed method has been evaluated and achieved results are compared with the design results by Tsai and Chou [12] and Tang *et al.* [4] for the LP and HP filters. Finally, the conclusions and discussions are given in Section V.

II. Problem Formulation

The objective function in the designing of IIR filter is to minimize difference between the ideal and the designed magnitude response with respect to the transfer function coefficients. The output of IIR filter depends on past outputs and present inputs. The rational transfer function of IIR in cascading form by cascading first and second order sections is [5]:

$$H(\omega, x) = A \left(\prod_{i=1}^M \frac{1 + a_{1i} e^{-j\omega}}{1 + b_{1i} e^{-j\omega}} \right) \times \left(\prod_{k=1}^N \frac{1 + c_{1k} e^{-j\omega} + c_{2k} e^{-2j\omega}}{1 + d_{1k} e^{-j\omega} + d_{2k} e^{-2j\omega}} \right) \quad (1)$$

where $x = [a_{11}, b_{11}, \dots, a_{1M}, b_{1M}, c_{11}, c_{21}, d_{11}, d_{21}, \dots, c_{1N}, c_{2N}, d_{1N}, d_{2N}, A]^T$. The vector x denotes the filter coefficients of dimension $V \times 1$ with $V = 2M + 4N + 1$ and ω represents the discrete frequency. The design aim of the paper is to minimize magnitude error function in L_1 -norm for LP and HP IIR digital filter by optimizing the filter coefficient vector x . The magnitude response is specified at K equally spaced discrete frequency points in pass-band and stop-band. The L_p -norm approximation error for the magnitude response is defined as [12].

$$err_m(x) = \left\{ \sum_{i=0}^K |H_I(\omega_i) - H_D(\omega_i, x)|^p \right\}^{1/p} \quad (2)$$

where $H_I(\omega_i)$ is the magnitude response of the ideal IIR filter and $H_D(\omega_i, x)$ is the magnitude response of the designed IIR filter. In the IIR filter design problem fixed grid approach is used [12]. For $p=1$, the magnitude response error denotes the L_1 -norm error and is defined as given below:

$$err_m(x) = \sum_{i=0}^V |H_I(\omega_i) - H_D(\omega_i, x)| \quad (3)$$

Ideal magnitude response $H_I(\omega_i)$ of IIR filter is given as:

$$H_I(\omega_i) = \begin{cases} 1, & \text{for } \omega_i \in \text{passband} \\ 0, & \text{for } \omega_i \in \text{stopband} \end{cases} \quad (4)$$

$$\text{Minimize } J(x) = err_m(x) \quad (5)$$

Subject to: the stability constraints:

$$1 + b_{1i} \geq 0 \quad (i = 1, 2, \dots, M) \quad (5a)$$

$$1 - b_{1i} \geq 0 \quad (i = 1, 2, \dots, M) \quad (5b)$$

$$1 - d_{2k} \geq 0 \quad (k = 1, 2, \dots, N) \quad (5c)$$

$$1 + d_{1k} + d_{2k} \geq 0 \quad (k = 1, 2, \dots, N) \quad (5d)$$

$$1 - d_{1k} + d_{2k} \geq 0 \quad (k = 1, 2, \dots, N) \quad (5e)$$

For stable IIR digital filter, all the poles should lie inside the unit circle. Therefore, the stability constraints given by (5a) to (5e) which are obtained by using the Jury method [23], are imposed in the design procedure on the coefficients of the digital IIR filter.

III. Design Methodology

PSO is an efficient global population-based optimization algorithm that manoeuvres and exploits a population of individuals to probe promising regions of the search space. In this context, the population is called a swarm and the individuals are called particles. In every iteration, each particle is updated by two best values. The first one is the best solution it has achieved so far. Second is the best value obtained so far by any particle in the population [24].

Assume NV is swarm size and a swarm consists of V particles. The j th particle is represented as $x_i = [x_{i1}, x_{i2}, \dots, x_{iV}]$. The rate of the velocity for this particle is represented as $v_i = [v_{i1}, v_{i2}, \dots, v_{iV}]$. The best previous position of each particle is recorded and represented as $xb_i = [xb_{i1}, xb_{i2}, \dots, xb_{iV}]$. The index of the best particle among all the particles in the group is represented by the $[G_1, G_2, \dots, G_V]$. The velocities of the particles are modified according to the following equation:

$$v_{ij}^{r+1} = C_{fc} \times \left\{ w \times v_{ij}^r + C_1 \times R_1 \times (xb_{ij}^r - x_{ij}^r) + C_2 \times R_2 \times (G_j^r - x_{ij}^r) \right\} \quad (6)$$

($i = 1, 2, \dots, NV; j = 1, 2, \dots, V$)

The modified position of each particle can be calculated using the current velocity and the distance from xb_{ij} to G_j as shown in the following formula

$$x_{ij}^{r+1} = x_{ij}^r + v_{ij}^{r+1} \quad (i = 1, 2, \dots, NV; j = 1, 2, \dots, V) \quad (7)$$

where NV is size of a swarm; V is the number of particles in a swarm; R is the pointer of iterations; w is the inertia weight factor; C_1 and C_2 are the acceleration constants; R_1 and R_2 are uniform random values in the range $[0, 1]$; v_{ij}^r is the velocity of j th member of i th particle at r th iteration, $V_j^{\min} \leq v_{ij}^r \leq V_j^{\max}$; x_{ij}^r is the current position of j th member of i th particle at r th iteration and C_{fc} is the constriction factor. While implementing PSO

the following considerations have been taken into account to facilitate the convergence and prevent an outburst of the swarm:

a. Maximum Velocity

The velocity of the particle is a stochastic variable and is, therefore, subject to create an unrestrained path, building the particle follow wider cycles in the problem space [25,26]. In order to control these oscillations, upper ($V_j^{\max}$) and lower ($V_j^{\min}$) limits are defined for the velocity. The particles with high velocity may skip the good optimal solutions and particles with small velocity are unable to find the optimal solutions. So, based on many past experiences with PSO, $V_j^{\max}$ was often set at 10-20% of the dynamic range of the variable on each dimension to find the optimal solution.

b. Acceleration Constants

The acceleration constants C_1 and C_2 determine the effect of personal best xb_{ij}^r and global best G_j^r positions. Low values limit the movement of the particles and high values result in rapid movement toward, or past, target regions. Hence the acceleration constants C_1 and C_2 are set to be 2.0 according to past experiences.

c Constriction factor / Inertia Weight

In recent past various studies performed on PSO convey that even when the maximum velocity and acceleration constants are selected accurately, the particles may still "outburst" i.e. go to infinity. In implementation of PSO we have implemented following two approaches to control this "outburst" *constriction factor* and *inertia weight* [26-28].

Clerc and Kennedy [27] were first to introduce constriction coefficient and is defined as follows:

$$C_{cfc} = \frac{2}{2 - \phi - \sqrt{\phi^2 - 4\phi}}, \quad C_1 + C_2 = \phi > 4.0 \quad (8)$$

In general, the constriction factor dampens the movement, once the particle is focused on the best point in an optimal region thus helping the convergence of the particle.

This parameter controls the exploration of the search space. Initially higher value is selected to allow the particles to move freely in order to find the global optimum neighbourhood fast. Once the optimal region is found, the value of the inertia weight is reduced to narrow the search. As originally developed by Shi and Eberhart [29], w often decreases linearly from 0.9 to 0.4 during a run. In general the inertia weight w is set according to the following equation:

$$w_i = w^{\max} - \frac{w^{\max} - w^{\min}}{iter^{\max}} \times iter^c \quad (9)$$

where $iter^{\max}$ is the maximum number of iterations and $iter^c$ is the current number of iterations.

d. Initialization of swarm

Random search is applied to initialize each element of swarm matrix. Global search is applied to explore the starting point and then the starting point is perturbed in local search space to record the best starting point. The search process is started by initializing the variable x_{ij}^u using (7) which is used to calculate objective function (5).

$$x_{ij}^0 = x_j^{\min} + rand() (x_j^{\max} - x_j^{\min}) \quad (i=1,2,...,NV; j=1,2,...,V) \quad (10)$$

where $rand$ is a uniform random generated number having value between 0 and; u is number of iterations; V is number of particles; NV is the size of swarm and $x_i^{\max}$ and $x_i^{\min}$ represents the maximum and minimum limits of i^{th} decision variable of vector x .

IV. Design Examples and Comparisons

For the purpose of comparison, the lowest order and design conditions of the digital IIR filter are set exactly the same as that given by Tang *et al.* in [4] for the LP and HP filters. The objective of designing the digital IIR filters is to minimize the objective function given by (5) with the stability constraints stated by (5a) to (5e) under the prescribed design conditions given in Table 1. The examples of the IIR filters considered by Tsai and Chou [12] and Tang *et al.* [4] are considered to test and compare the performance of proposed PSO approach.

From the evaluated results with the proposed method in Tables 2 to 3 and Figs. 2 to 3, it can be observed that, for the LP and HP filters, the proposed PSO approach gives the smaller L_1 -norm approximation errors and the better magnitude performances in both pass-band and stop-band than the genetic algorithm based method given by Tsai and Chou [12] and Tang *et al.* [4] respectively. The designed LP and HP IIR filter models obtained by the PSO algorithm are given below.

$$H_{LP}(z) = 0.033490 \frac{(z + 1.077239)(z^2 - 0.285299z + 1.012133)}{(z - 0.663156)(z^2 - 1.380685z + 0.733563)} \quad (11)$$

$$H_{HP}(z) = 0.039312 \frac{(z - 1.160398)(z^2 + 0.488269z + 0.979884)}{(z + 0.654584)(z^2 + 1.374556z + 0.737961)} \quad (12)$$

Table 1 Prescribed Design Conditions on LP and HP Filters.

Filter type	Pass-band	Stop-band	Maximum Value of $ H(\omega, x) $
Low-Pass	$0 \leq \omega \leq 0.2\pi$	$0.3\pi \leq \omega \leq \pi$	1
High-Pass	$0.8\pi \leq \omega \leq \pi$	$0 \leq \omega \leq 0.7\pi$	1
Band-Pass	$0.4\pi \leq \omega \leq 0.6\pi$	$0 \leq \omega \leq 0.25\pi$ $0.75 \leq \omega \leq \pi$	1
Band-Stop	$0 \leq \omega \leq 0.25\pi$ $0.75 \leq \omega \leq \pi$	$0.4\pi \leq \omega \leq 0.6\pi$	1

Table 2 Design results for LP filter

Method	L_1 -norm error	Pass-band performance (Ripple magnitude)	Stop-band performance (Ripple magnitude)
PSO Approach	3.7364	$0.9277 \leq H(e^{j\omega}) \leq 1.0140$ (0.0864)	$ H(e^{j\omega}) \leq 0.1626$ (0.1626)
TIA Approach[12]	3.8157	$0.8914 \leq H(e^{j\omega}) \leq 1.0000$ (0.1086)	$ H(e^{j\omega}) \leq 0.1638$ (0.1638)
Method of Tang <i>et al.</i> [4]	4.3395	$0.8870 \leq H(e^{j\omega}) \leq 1.009$ (0.1139)	$ H(e^{j\omega}) \leq 0.1802$ (0.1802)

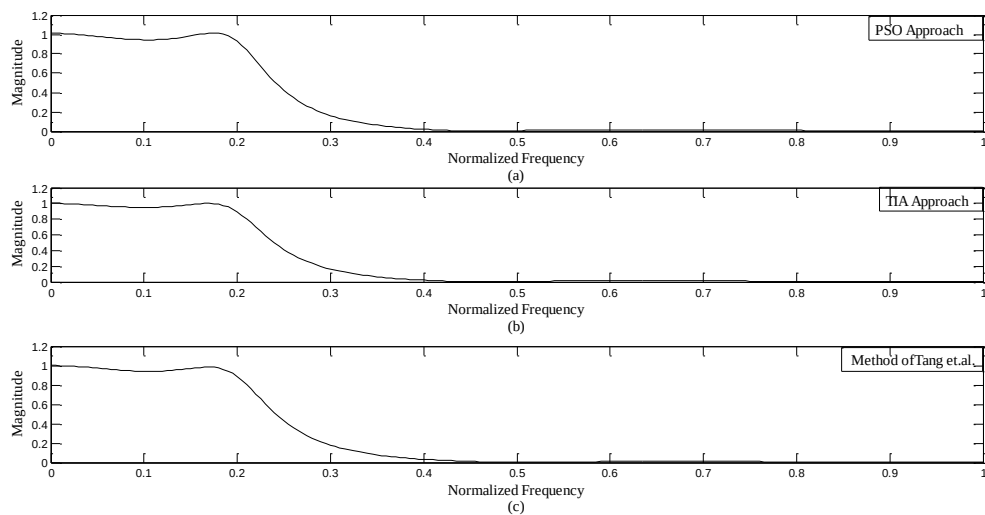


Fig. 2 Magnitude responses of LP filter using the PSO method and the methods given in [12] and [4], respectively.

Table 3 Design results for HP filter

Method	L_1 -norm error	Pass-band performance (Ripple magnitude)	Stop-band performance (Ripple magnitude)
PSO Approach	4.0388	$0.9417 \leq H(e^{j\omega}) \leq 1.009$ (0.0675)	$ H(e^{j\omega}) \leq 0.1530$ (0.1530)
TIA Approach[12]	4.1819	$0.9229 \leq H(e^{j\omega}) \leq 1.000$ (0.0771)	$ H(e^{j\omega}) \leq 0.1424$ (0.1424)
Method of Tang <i>et al.</i> [4]	14.5078	$0.9224 \leq H(e^{j\omega}) \leq 1.003$ (0.0779)	$ H(e^{j\omega}) \leq 0.1819$ (0.1819)

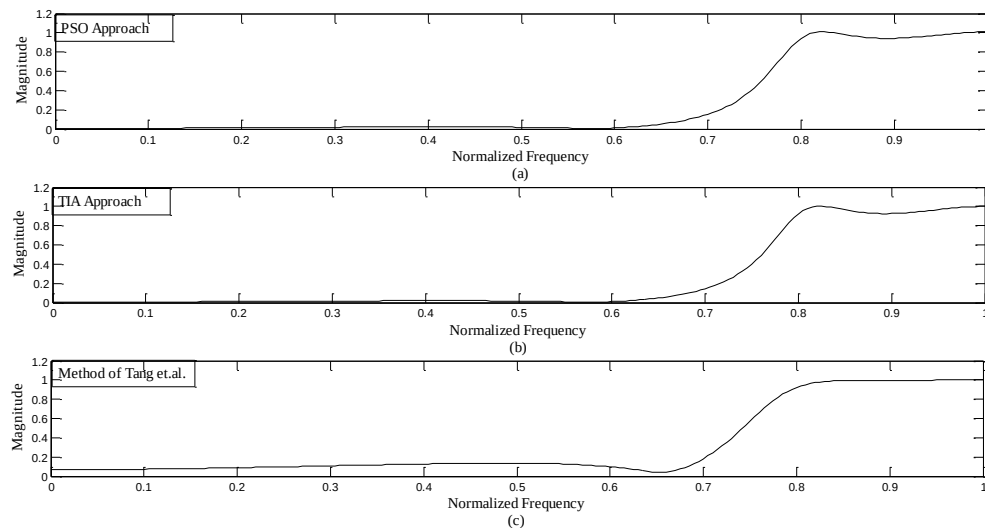


Fig. 3 Magnitude responses of HP filter using the PSO method and the methods given in [12] and [4], respectively.

V. Conclusion

This paper proposes a PSO method for the design of LP and HP digital IIR filters based on L_1 -norm approximation error for magnitude response approximation. In order to strengthen the PSO approach various additional factors have been taken care of like: random initialization of swarm, maximum velocity, constriction factor and inertia weight. As shown through simulation results, PSO algorithm gives better performance as compared to GAs in terms of magnitude response and attenuation in passband and stopband. The main advantages of the PSO algorithm are summarized as; simplicity in implementation, robust against local minimum problem and has a fast convergence speed.

References

- [1] John G. Proakis, Digital signal processing, Prantice-Hall International, inc., New Jersey, 2010.
- [2] J.H. Li and F.L. Yin, "Genetic optimization algorithm for designing IIR digital filters," *Journal of China Institute of Communications China*, Vol. 17, pp. 1-7, 1996.
- [3] S.P. Harris and E.C. Ifeachor, "Automatic design of frequency sampling filters by hybrid genetic algorithm techniques," *IEEE Transactions on Signal Processing*, Vol. 46, No. 12, pp. 3304-3314, December 1998.
- [4] K.S. Tang, K.F. Man, S. Kwong and Z.F. Liu, "Design and optimization of IIR filter structure using hierarchical genetic algorithms," *IEEE Transactions on Industrial Electronics*, Vol. 45, No. 3, pp. 481-487, June 1998.
- [5] G. Vanuytsel, P. Boets, L.V. Biesen and S. Temmerman, "Efficient hybrid optimization of fixed-point cascaded IIR filter coefficients," *Proceeding: IEEE International Conference on Instrumentation and Measurement Technology*, Anchorage, AK, 2002, pp.793-797.
- [6] Y. Liu, S.Q. Shao, H. Zhao, X.F. Liao, and J.B. Yu, "An application of genetic algorithms with guiding strategy in the design of digital filters," *Proceeding: International Conference on Communication, Circuits Systems*, Chengdu, China, 2004, pp. 1141-1145.
- [7] Chaohua Dai, Weirong Chen and Yunfang Zhu, "Seeker optimization algorithm for digital IIR filter design," *IEEE Transactions on Industrial Electronics*, Vol. 57, No. 5, pp. 1710-1718, May 2010.
- [8] S. Chen, R. H. Istepanian, and B. L. Luk, "Digital IIR filter design using adaptive simulated annealing," *Journal of Digital Signal Processing*, Vol. 11, no. 3, pp. 241-251, July 2001.
- [9] A. Kalinli and N. Karaboga, "A new method for adaptive IIR filter design based on Tabu search algorithm," *International Journal of Electronics and Communication (AEÜ)*, Vol. 59, no. 2, pp. 111-117, 2005.
- [10] N. Karaboga, A. Kalinli, and D. Karaboga, "Designing IIR filters using ant colony optimisation algorithm," *Journal of Engineering Applications of Artificial Intelligence*, Vol. 17, no. 3, pp. 301-309, April 2004.
- [11] Jinn-Tsong Tsai, Jyh-Horng Chou and Tung-Kuan Liu, "Optimal design of digital IIR filters by using Hybrid Taguchi Genetic Algorithm" *IEEE Transactions on Industrial Electronics*, Vol. 53, No. 3, pp. 867-879, June 2006.
- [12] Jinn-Tsong Tsai and Jyh-Horng Chou, "Optimal design of digital IIR filters by using an improved immune algorithm" *IEEE Transactions on Signal Processing*, Vol. 54, No. 12, pp. 4582-4596, December 2006.
- [13] J. Kennedy, R. Eberhart, Particle swarm optimization, in: *Proceedings of the IEEE International Conference on Neural Network*, 1995, pp. 1942-1948.
- [14] R.C. Eberhart, Y..Shi, Particle swarm optimization: developments, applications and resources, evolutionary computation, in: *Proceedings of the 2001 Congress on Evolutionary Computation*, 2001, pp. 81-86.
- [15] D.J. Krusienski, W. K. Jenkins, "A modified particle swarm optimization algorithm for adaptive filtering", *IEEE International Symposium on Circuits and Systems*, ISCAS 2006, pp. 137-140.
- [16] M. Najjarzadeh, A. Ayatollahi, "FIR Digital Filters Design: Particle Swarm Optimization Utilizing LMS and Minimax Strategies", *IEEE International Symposium on Signal Processing and Information Technology*, 2008, ISSPIT 2008, pp.129-132.
- [17] J.I. Ababneh, M.H. Bataineh, Linear phase FIR filter design using particle swarm optimization and genetic algorithms", *Digital Signal Processing*, 2008, 18, (4), 657-668.
- [18] W. Fang, J. Sun and W. Xu, "A mutated quantum-behaved particle swarm optimizer for digital IIR filter design," *EURASIP Journal on Advances in Signal Processing*, Article ID-367465, pp. 1-7, 2009.
- [19] A. Sarangi, R.K. Mahapatra, S.P. Panigrahi, DEPSO and PSO-QI in digital filter design, *Expert Systems with Applications* 38 (9) (2011) 10966-10973.
- [20] X. Yu, J. Liu, H. Li, An adaptive inertia weight particle swarm optimization algorithm for IIR digital filter in: *International Conference on Artificial Intelligence and Computational Intelligence*, 2009, AICI '09, vol. 1, pp. 114-118.

- [21] D. Jia, Y. Jiao, J. Zhang, Satisfactory design of IIR digital filter based on chaotic mutation particle swarm optimization, in: 3rd International Conference on Genetic and Evolutionary Computing, 2009, WGECC '09, pp. 48–51.
- [22] Y. Gao, Y. Li, H. Qian, The design of IIR digital filter based on chaos particle swarm optimization algorithm, in: Second International Conference on Genetic and Evolutionary Computing, 2008, WGECC '08, pp. 303–306.
- [23] I. Jury, Theory and Application of the Z-Transform Method. New York: Wiley, 1964.
- [24] Kothari, D.P. and Dhillon, J.S. (2011) *Power System Optimization*. Prentice Hall of India, New Delhi.
- [25] Hu, X., Shi, Y. and Eberhart, R. (2004) Recent advances in particle swarm. In *Proc. IEEE Congr. Evol. Comput.*, vol. 1: pp. 90–97, West Lafayette, IN, USA.
- [26] Eberhart, R. and Shi, Y. (2000) Comparing inertia weights and constriction factors in particle swarm optimization. In *Proc. IEEE Congress Evol. Comput.*, vol. 1: pp. 84–88, La Jolla, CA.
- [27] Clerc, M. and Kennedy, J. (2002) The particle swarm-explosion, stability, and convergence in a multidimensional complex space. *IEEE Trans. Evol. Comput.*, vol. 6 (1): pp. 58–73.
- [28] Bergh, F. and Engelbrecht, A. (2004) A cooperative approach to particle swarm optimization. *IEEE Trans. Evol. Comput.*, vol. 8 (3): pp. 225–239.
- [29] Shi, Y. and Eberhart, R. (1998) A modified particle swarm optimizer. In *Proc. IEEE World Congr. Comput. Intell.*: pp. 69–73, Anchorage, AK.